

# Alpha™ HT

## HIGH TEMPERATURE HEPA FILTERS



- Individually tested for certified performance
- Available in gasket or fluid seal
- Rated to 500°F (260°C) continuous operation

### Typical Applications

- Sterilization tunnels and ovens
- Life Sciences
- Film/Drying

AAF manufactures metal-frame separator-style HEPA filters for applications with high-temperature requirements up to 500°F (260°C). High temperature filters are available with either a gasket or fluid seal. Filters with silicone fluid seal have a maximum service temperature of 390°F (199°C).

### HEPA Filters

Each HEPA filter has a minimum efficiency of 99.97% on 0.30 micrometer size particles when tested at rated capacity on a Q-107 Penetrometer. Each filter is challenged with an approved nearly monodispersed oil aerosol of 0.30 micrometer size. By measuring the upstream and downstream concentration of these particles with a light scattering photometer, the penetration can be determined and the efficiency can be calculated.

### Scan Tested HEPA Filters

Each scan tested HEPA filter has a minimum efficiency of 99.99% on 0.30 micrometer particles. Scan testing is in accordance with Section 6.2 of IEST-RP-CC034.1, HEPA and ULPA Filters Leak Tests. In the scan test, the filter is challenged with a high concentration of an approved oil aerosol or PSL (Polystyrene Latex Spheres). The media pack and pack-to-frame seal is scanned using a photometer or particle counter to ensure that there are no leaks greater than .01% of the upstream concentration at 100 FPM face velocity.

# Alpha™ HT Filters

## Silicone Sealant


The Alpha HT uses a high temperature Room Temperature Vulcanization (RTV) silastic-sealant silicone compound rated for continuous service up to 500°F (260°C). NOTE: This high temperature sealant is not UL 586 approved.

## Product Information

Filter Size and Frame Depth Designator	Actual Size (inches) (HxWxD)	CFM Capacity at Clean Pressure Drop, Inches w.g.			Weight (lbs.)
		.65	1.0	1.35	
GG-F	24 x 24 x 11½	650	1000	1300	38
GC-F	24 x 12 x 11½	300	455	590	26
YY-F	23¾ x 23¾ x 11½	615	945	1235	37
YU-F	23¾ x 11¾ x 11½	275	425	550	25
GN-F	24 x 30 x 11½	830	1275	1655	45
CC-F	12 x 12 x 11½	135	205	265	14

## Performance Data

Initial Resistance vs. Filter Face Velocity

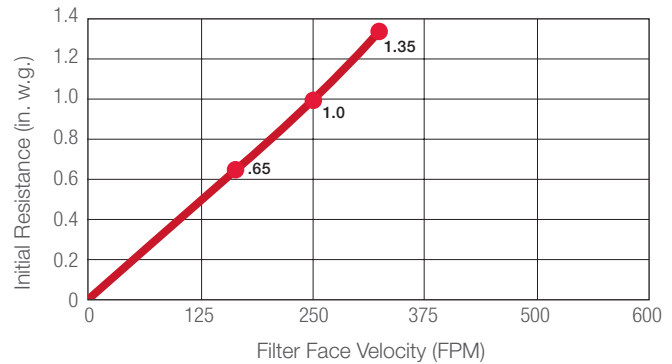

9920 Corporate Campus Drive, Suite 2200, Louisville, KY 40223-5690  
888.223.2003 Fax 888.223.6500 | aafintl.com

AAF has a policy of continuous product research and improvement. We reserve the right to change design and specifications without notice.

©2023 AAF International and its affiliated companies.

ISO Certified Firm

AFP-1-363A 08/22