





9920 Corporate Campus Dr., Suite 2200, Louisville, KY 40223-5000
 P.O. Box 35690, Louisville, KY 40232-5690 | 888.223.2003 | aafintl.com

TM HOOD FOR GASKET GRID APPLICATIONS SUBMITTAL SHEET HOT MELT SEPARATOR


AAF CONTROL NO.:		P.O.:	
DATE:	March 18, 2024	BY:	
CUSTOMER:		LOCATION:	
CONTACT NAME:		REFERENCE:	

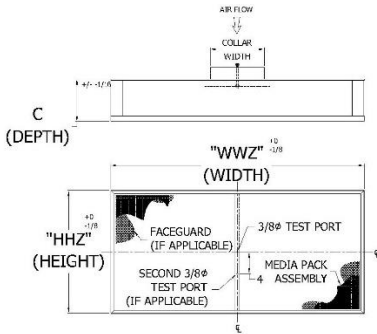

ADJUSTABLE DAMPER

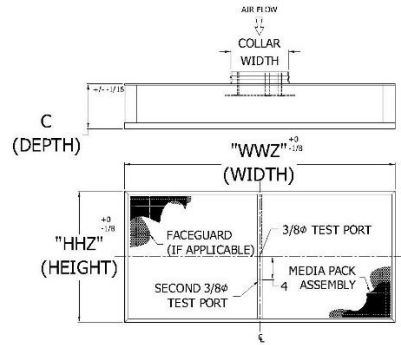

FIXED DAMPER

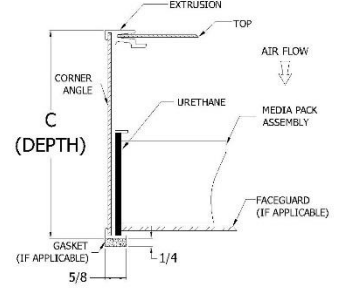

CROSS SECTION - SIDE VIEW

THE SIZES DESIGNATORS IS FORMATTED AS FOLLOWS: "EHHZWWZ"

- "E" = All style codes start with "E"
 - "HH" = Filter height in whole inches (e.g. "12" for 12 inches, "08" for 8 inches)
 - "WW" = Filter width in whole inches (e.g. "24" for 24 inches, "09" for 9 inches)
 - "Z" = Fractions of inches as follows:
- | | | | | | |
|-----------|------------|------------|------------|-----------|-----------|
| A = 0 | B = 1/8" | C = 1/4" | D = 3/8" | E = 1/2" | F = 5/8" |
| G = 3/4" | H = 7/8" | J = 1/16" | K = 3/16" | L = 5/16" | M = 7/16" |
| N = 9/16" | P = 11/16" | Q = 13/16" | R = 15/16" | | |

EXAMPLES: E24A24A = 24" height x 24" width
 E23D23D = 23-3/8" height x 23-3/8" width
 E08P33H = 8-11/16" height x 33-7/8" width

(1) MEDIA

- 99.97% / 99.99% (Glass, HEPA) (A)
- 99.99% on 0.3um (Membrane, PAO Compatible) (B)
- 99.995% on MPPS (Membrane, PAO Compatible) (C)
- 95% BioCel (Glass) (D)
- 99.999% / 99.9995% (Glass, ULPA) (E)
- 99.99995% (Membrane, ULPA) (F)
- SPECIAL - _____ (NSP required, enter in Salesforce) (Z)

(2) FRAME MATERIAL AND DEPTH: ANODIZED ALUMINUM

- 7" (02)
- 5" (05)
- NON-STANDARD SUBSTITUTE FRAME _____ (NSP required, enter in Salesforce) (99)

(3) FILTER PACK DEPTH:

- IF 7" (02) IS SELECTED IN SECTION 2:**
- 2" Nominal (K)
 - 2-1/2" Nominal (L)
 - 3" Nominal (M)
 - 3-1/4" Nominal (N)
 - 3-1/2" Nominal (P)
 - 3-3/4" Nominal (Q)
 - 4" Nominal (R)
 - 35mm (This must be selected if "F" is selection in Section 1.) (H)
 - SPECIAL - _____ (NSP required, enter in Salesforce) (X)

- IF 5" (05) IS SELECTED IN SECTION 2:**
- 2" Nominal (K)
 - 35mm (This must be selected if "F" is selection in Section 1.) (H)
 - SPECIAL - _____ (NSP required, enter in Salesforce) (X)

IF "NON-STANDARD SUBSTITUTE CELL SIDES" IS SELECTED IN SECTION 2, PLEASE INDICATE PACK DEPTH BELOW:
 _____ (NSP required, enter in Salesforce)

(4) COLLAR/DIFFUSER (WITH POLYURETHANE BOND):

- **Adjustable Dampers Must Include Center Divider and Test Port(s) in Section 10****
- 10" Collar with Adjustable Damper (3)
 - 12" Collar with Adjustable Damper (4)
 - 14" Collar with Adjustable Damper (5)
 - 10" Collar with Fixed Damper (6)
 - 12" Collar with Fixed Damper (7)
 - 14" Collar with Fixed Damper (8)
 - SPECIAL - _____ (NSP required, enter in Salesforce) (9)

(5) GASKET MATERIAL:

- None (P)
- Grey PVC (1/4" Thick x 5/8" Wide with Dovetail Joints) (W)
- SPECIAL - _____ (NSP required, enter in Salesforce) (Z)

(6) GASKET LOCATION:

- None (If "P" is selected in Section 5, then this must be selected.) (0)
- Air Leaving Side (2)
- SPECIAL - _____ (NSP required, enter in Salesforce) (4)

(7) ACCEPTANCE LEVEL:

- IF "A" MEDIA IS SELECTED IN SECTION 1:**
- 99.99% PSL on 0.3um (G)
 - 99.99% Scan on 0.3um (H)
 - 99.99% PAO Scan ON 0.3um (S)
 - SPECIAL - _____ (NSP required, enter in Salesforce) (E)

- IF "B" MEDIA IS SELECTED IN SECTION 1:**
- 99.99% Scan and Test on 0.3um (H)
 - 99.99% PAO Scan ON 0.3um (S)
 - SPECIAL - _____ (NSP required, enter in Salesforce) (E)

- IF "C" MEDIA IS SELECTED IN SECTION 1:**
- 99.995% (H14) PSL on MPPS (D)
 - SPECIAL - _____ (NSP required, enter in Salesforce) (E)

- IF "D" MEDIA IS SELECTED IN SECTION 1:**
- 95% DOP (F)
 - SPECIAL - _____ (NSP required, enter in Salesforce) (E)

- IF "E" MEDIA IS SELECTED IN SECTION 1:**
- 99.999% PSL on 0.3um (J)
 - 99.999% PSL Scan and Test on 0.3um (K)
 - 99.9995% PSL on MPPS (M)
 - 99.9995% PSL on MPPS (Autoscan) (P)
 - SPECIAL - _____ (NSP required, enter in Salesforce) (E)

- IF "F" MEDIA IS SELECTED IN SECTION 1:**
- 99.99995% PSL on MPPS (Autoscan) (T)
 - SPECIAL - _____ (NSP required, enter in Salesforce) (E)

IF "Z" MEDIA IS SELECTED IN SECTION 1, PLEASE ENTER SPECIAL TEST CRITERIA REQUIRED:
 _____ (NSP required, enter in Salesforce)

(8) FACEGUARD LOCATION:

- NO FACEGUARD (0)
- FACEGUARD DOWNSTREAM (2)
- SPECIAL - _____ (NSP required, enter in Salesforce) (4)

(9) FACEGUARD MATERIAL:

- NO FACEGUARD (A)
- EXPANDED STEEL, FLATTENED, WHITE EPOXY POWDERCOAT (B)
- EXPANDED 304 STAINLESS STEEL (C)
- PERFORATED 304 STAINLESS STEEL (D)
- PERFORATED ANODIZED ALUMINUM (E)
- EXPANDED 316 STAINLESS STEEL (F)
- PERFORATED 316 STAINLESS STEEL (G)
- EXPANDED ANODIZED ALUMINUM (H)
- SPECIAL - _____ (NSP required, enter in Salesforce) (Z)

(10) CENTER DIVIDER / TEST PORT(S):

- IF "3", "4" OR "5" IS SELECTED IN SECTION 4:**
- CENTER DIVIDER AND ONE TEST PORT (C)
 - CENTER DIVIDER AND TWO TEST PORTS (D)
 - SPECIAL - _____ (NSP required, enter in Salesforce) (Z)

- IF "6", "7" OR "8" IS SELECTED IN SECTION 4:**
- NO CENTER DIVIDER OR TEST PORTS (A)
 - CENTER DIVIDER (B)
 - CENTER DIVIDER AND ONE TEST PORT (C)
 - CENTER DIVIDER AND TWO TEST PORTS (D)
 - SPECIAL - _____ (NSP required, enter in Salesforce) (Z)

QTY	PART NUMBER	STYLE CODE	HEIGHT	WIDTH	DEPTH	NOTES

Customer Signature: _____

Approval Date: _____

